

LED Panel Light

Description: 300x300 led panel light




Features


1. Ideal for replacing conventional fluorescent tube fitting.
2. Easy installation,
3. No Glare, No Flicker, No In fra Red.
4. Instant Start, No Warm Up.
5. Low-Cost Maintenance.
6. 50,000 Hour Lamp Life.
7. White or Aluminum Trim
8. Remote control dimmable
9. Even light distribution, high quality PMMA panel with unique light distribution design
10. World-wide recognition, CE ROHS certificated

Application


1. Commercial lighting, such as hotel, meeting room,
2. Office lighting, factory , Office buildings,
3. Warehouse lighting, household lighting, etc.
4. Hospitals, schools, subways and washrooms and any other places which need high rendering index lighting.

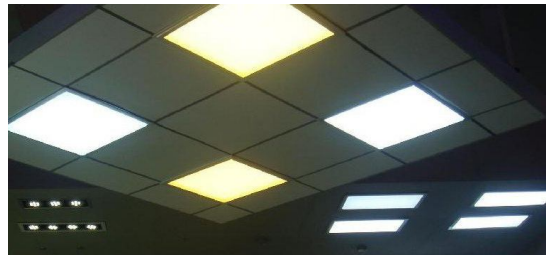

Dimension:

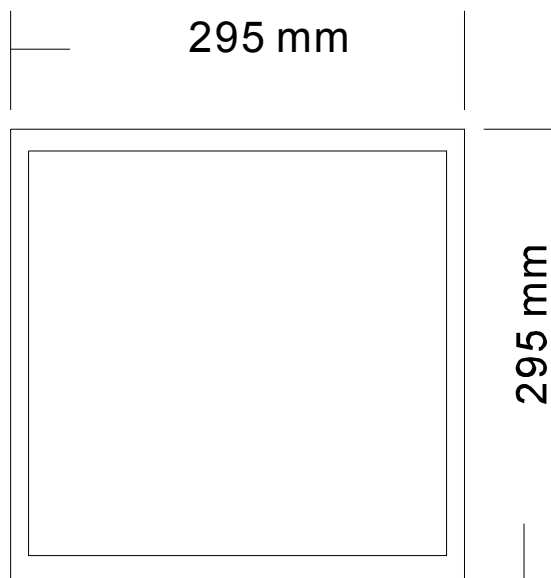

Packing:

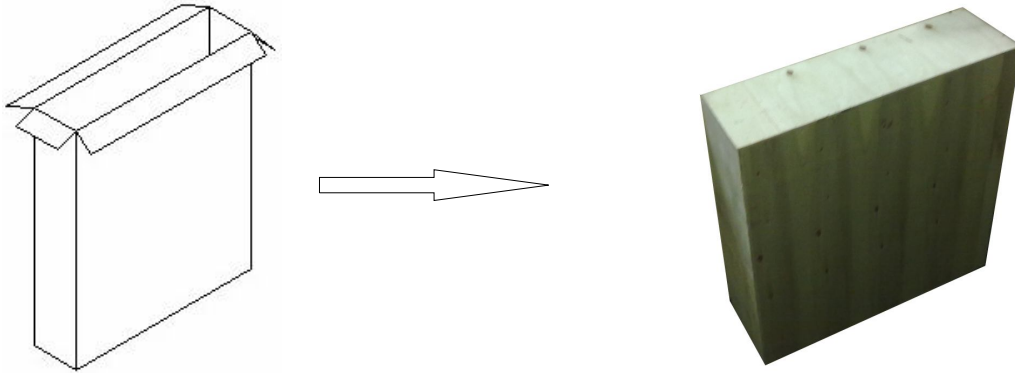


5pcs/wooden box
Dimension:320*320*42mm

Specification:

Item NO.:	GL-C-01
Light Source:	Ultra bright SMD LED, Epistar LED
Quantity of LED	180
Color temperature:	cool white(6000-6500K) commercial white(4000-4500K) warm white(2800-3300K)
Luminous Flux	1248 Lm(Cold white), 1200Lm(Natural white), 1080 Lm(Warm white)
CRI :	>80
Beam Angle:	120 degree
Input Voltage:	AC85V~AC265V
Wattage:	18watt
Dimension:	300x300x12.5mm
Materials:	1.High quality lumisheet acrylic plate (PMMA).Aluminum PCB 2. Aluminum frame
Weight	1.5KG/PCS
Lifespan:	>50000hrs
Operating Temperature	-10 °C to +40°C
Storage Temperature	-20 °C to +60°C
Humidity Operating	10-80%
Humidity Storage	10-80%
IP Code	IP41
Fixing Ways	Built-in, Mounted, Suspended

Installation Methods:

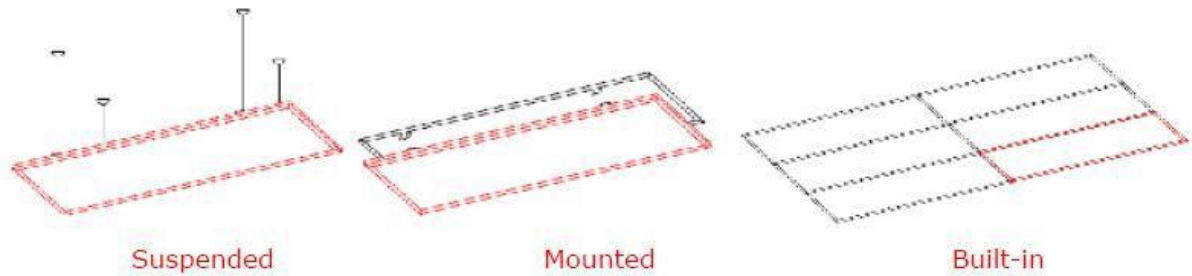

ATTENTION::



- To protect the Panel light and ensure the life and reliability of the LEDs, please be gentle. Squeeze and beat are not allowed.
- The light should be installed in an appropriate environment.
- Differentiate between the anode and the electrode to avoid short circuit Make sure that the power voltage and the lighting voltage are the same.
- Be careful to operate. Please make sure that the power is off before you maintain, install change the light.