



# LLG Led Driver

## LLG-M-230/350

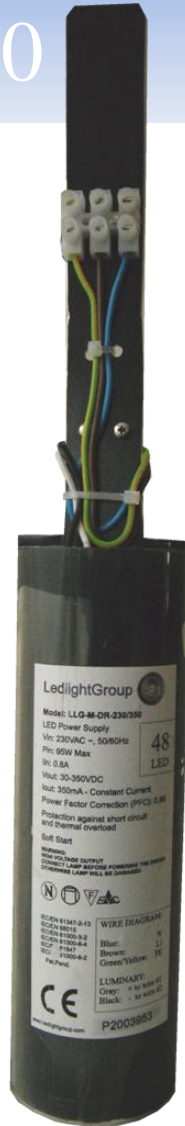


Flexible

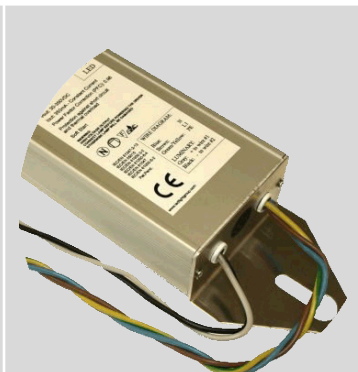

IP67



IP Box

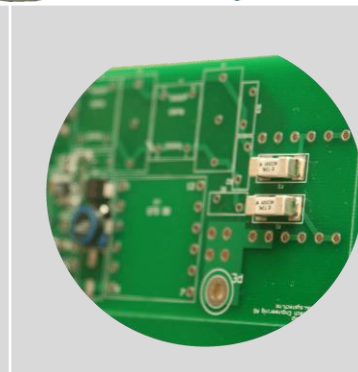

# LLG-M-230/350


**Application:** For CrystalLed series

**FEATURES:**-High Voltage Constant Current LED Driver - Maintenance savings - Long lifetime-Quality components - Robust construction - Environmental Standards - Thermal overload protection - Short circuit protection - PFC - Power Factor Correction - IEC/EN –Safety / EMC

- HIGH OUTPUT VOLTAGE
- CONSTANT CURRENT OUTPUT
- POWER FACTOR CORRECTION
- SOFT START
- SIMPLE INSTALLATION
- HIGH EFFICIENCY



LLG-M-230/350

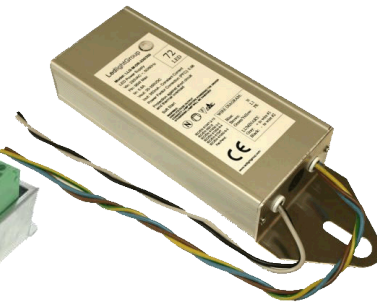

LLG-M-230/350 IP



LLG-M-230/350 ID

IEC/EN 61347-2-13  
IEC/EN 55015  
IEC/EN 61000-3-2  
IEC/EN 61000-6-4  
IEC/EN 61547  
IEC/EN 61000-6-2  
Pat. Pend.



**TECHNICAL:**

PARAMETERS LLG-M-230/350	Indoor usage	
Input Voltage	85 – 265VAC 50/60Hz	
Output Power	110W Max	
Output Voltage	30 – 390VDC	
Output Current	350mA	
Power Factor Correction	0.98	
Size L x W x H mm	180 x 65 x 60	
Load	10 to 100 LED's	
IP	Indoor usage	
PARAMETERS LLG-M-230/350 IP	& LLG-M-230/350 ID	
Input Voltage	85 – 265VAC 50/60Hz	
Output Power	110W Max	
Output Voltage	30 – 390VDC	
Output Current	350mA	
Power Factor Correction	0.98	
Size L x W x H mm	180 x 65 x 60	
Load	10 to 100 LED's	
IP	IP68	

DISTRUBUTOR

PRODUCER

**Ledlight Group AS**  
Nedrevei, Bygg 155  
N-3183 Horten  
Norway  
Phone: 0047 40006326  
Url: [www.ledlightgroup.com](http://www.ledlightgroup.com) / [www.llg.no](http://www.llg.no)  
Mail: [post@llg.no](mailto:post@llg.no)